














Thank you for selecting EarthWay for your deflector needs. Our production team in Northern Indiana takes pride in building each and every product.

Our customer support team is standing ready to ensure your success. Please contact us at www.EarthWay.com to see our full line of lawn, garden, and professional tools.

ASSEMBLY HARDWARE – BY SPREADER MODEL

ALL MODELS	#12299 Front Panel 	#12303 Side Panel 	#60161 Frame 	#12298 Panel Mounting Clips 	#36201 1/4-20X3/4 Bolt 	#363300 1/4-20 Locknut 
ATTACH TO 90950 50LB SPREADER	#12304 Hopper Mounting Clamps 	#36222 1/4-20X1 Screw 	#36305 1/4-20 Hex Nut 			
ATTACH TO 2150, 90365, 90399 & 2170 MODELS	#12305 Hopper Mounting 	#36210 1/4-20X1 Bolt 	#363300 1/4-20 Locknut 			



Step 1: Open each of the seven clips (#12298) and stretch each one over the wire deflector frame (#60161). Place approximately the locations shown with two clips on each side and three across the front of the deflector.

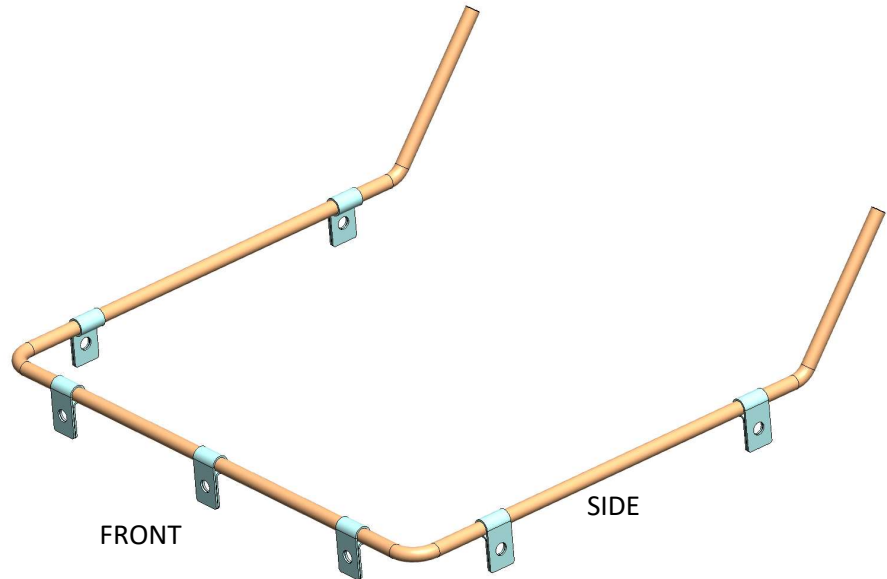

Step 2: Select a side deflector (panels with only two holes). Both side panels are the same. Orient as shown and insert side panel between clip ears. Align holes in clip with holes in deflector.


Insert 1/4-20 bolts (3/4" long) through one clip at a time.

Attach 1/4-20 locknut to bolt to backside of deflector.

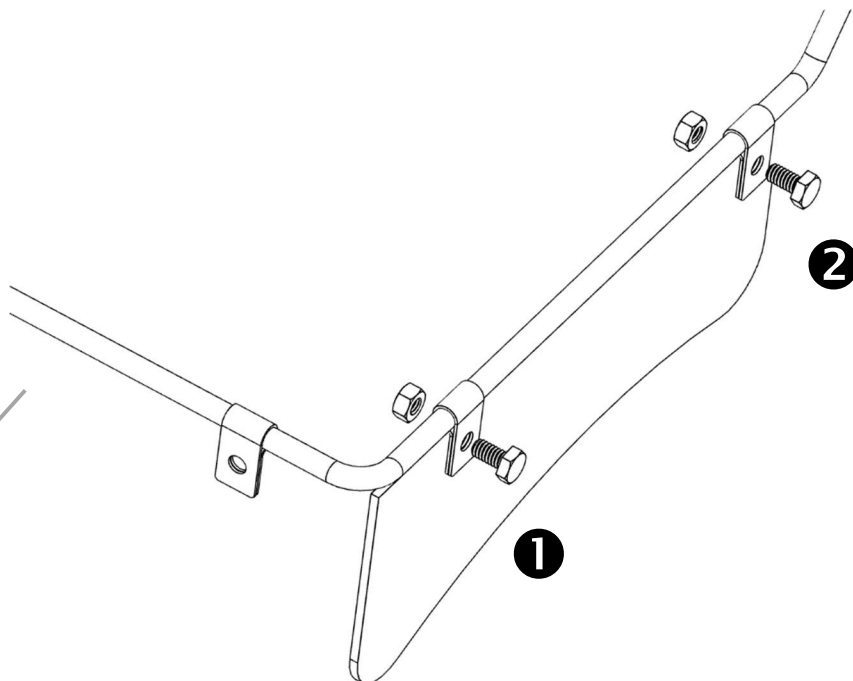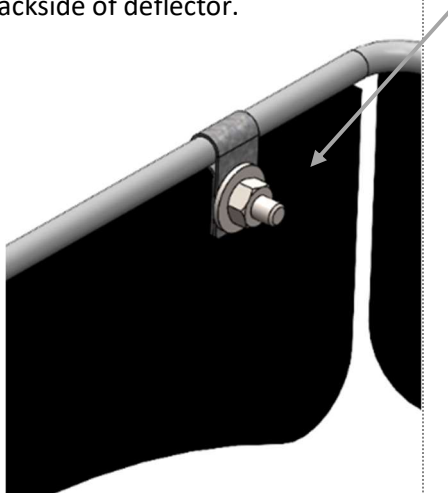


Step 3: Repeat step 2 with the other side panel.

Step 4: Select the front panel (the one with three holes). Follow the same process as in step one and insert three bolts and attach with three nuts.

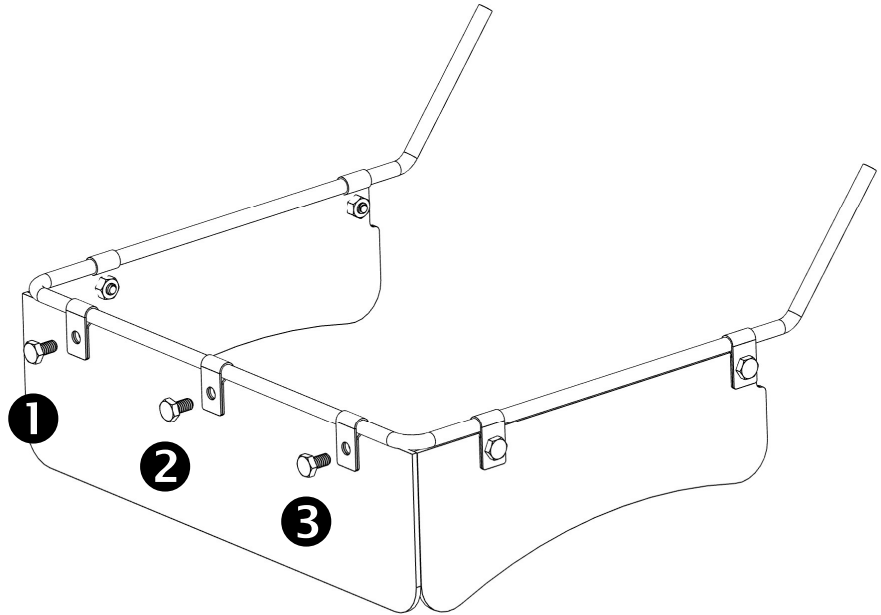


TO ATTACH DEFLECTOR TO 90950 50LB ICE MELT SPREADER

Step 5: Locate the deflector mounting brackets (#12304). Using a screwdriver, slightly pry the bracket open and insert over each end of the deflector frame.

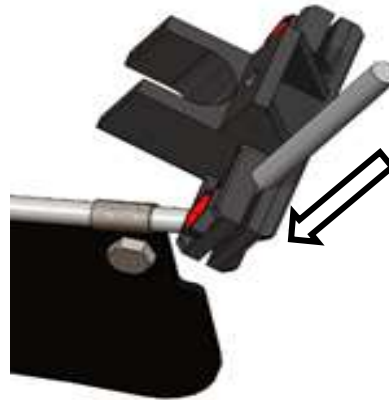


Step 6: Locate on the spreader the cross-bar lock nuts. Remove the locknuts and place the deflector bracket over the bolt. The deflector bracket has a c-shaped section that will fit flush on the end of the spreader stand (black bent hoop bar).

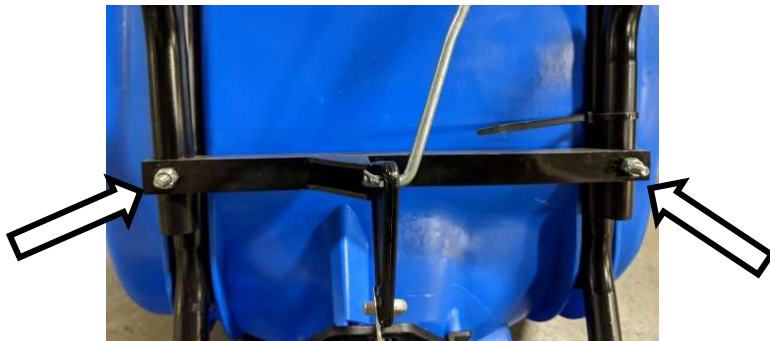

Step 7: Locate on the spreader the cross-bar lock nuts. Remove the locknuts and place the deflector bracket over the bolt. The deflector bracket has a c-shaped section that will fit flush on the end of the spreader stand (black bent hoop bar).


Step 8: Re-install each lock nut through the deflector mounting bracket so that the deflector will now be attached to the 90950 spreader.

Step 9: Adjust deflector so that side panels have proper clearance from tires throughout panel rotation. To increase clearance, slide wire deflector frame through the guide in the deflector mounting clamp ears.

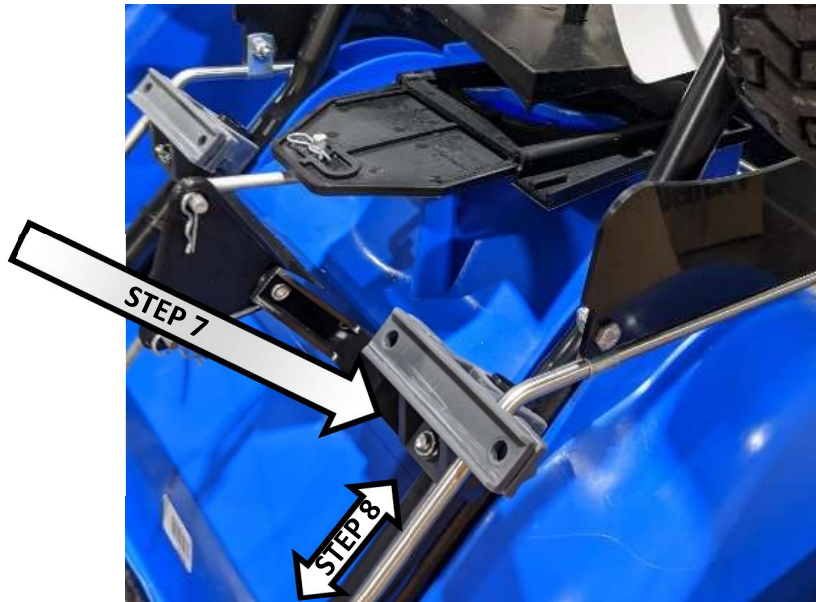

TO ATTACH DEFLECTOR TO 2150,2170,90399 or 90365 SPREADERS

Step 5: Mount round frame clamps (# 12305) on deflector frame in the orientation shown. Leave bolts (#36210) and locknuts (# 36330) marked by arrows loose. This will allow you to split bracket and slide deflector bracket over frame of spreader and clamp tight.

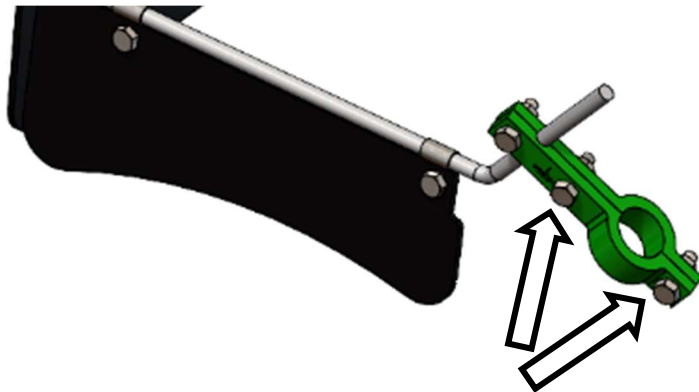


Step 6: Slide bracket over frame of spreader.

Step 7: Adjust location of clamps so that deflector panels can be rotated past wheels. Hand tighten all bolts (#36210) and locknuts (# 36330). Do not use an impact wrench.



TO ATTACH DEFLECTOR TO Prizelawn CBRIV Series

Step 5: Mount round frame clamps (#12305) on deflector frame in the orientation shown. Leave bolts (#36210) and locknuts (# 36330) marked by arrows loose. This will allow you to split bracket and slide deflector bracket over the frame of spreader and clamp tightly.

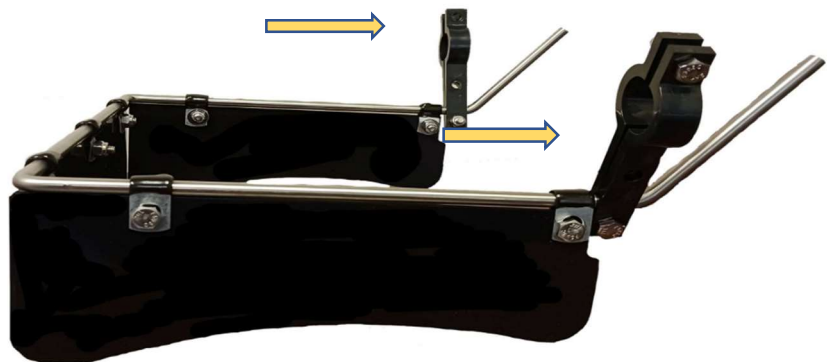

Step 5

Step 6: Slightly spread clamps to go over the spreader frame, place the clamp approximately 1" to 1 ¼" away from frame upright (as shown in picture to the right).

Step 7: Tighten all Bolts – Make sure that the deflector does not interfere with the impeller.



CUSTOMER SERVICE

SUPPORT@EARTHWAY.COM | www.EARTHWAY.com | 1009 Maple Street, Bristol, IN 46507

ONE YEAR WARRANTY

Limited Warranty

EarthWay Products, Inc. provides this limited warranty that this product is free of defects in original workmanship and materials for a period of one year to the end user with the original purchase receipt. If a manufacturing non-conformance is found, EarthWay Products, Inc. at its discretion will repair or replace the part(s)/product at no charge provided the failure is not the result of incorrect installation, mishandling, misuse, tampering, improper storage, or normal wear and tear as determined by EarthWay. Due to the corrosive nature of most fertilizers and ice melt products, EarthWay Products, Inc. makes no warranty against and specifically excludes part(s) or product degradation or failure due to corrosion or its effects .

EarthWay at its discretion may require that the part(s) or product be returned along with the original purchase receipt for examination and compliance with the terms of this limited warranty. Do not return any product without first receiving authorization from EarthWay Products, Inc. IN NO EVENT SHALL EITHER PARTY BE LIABLE TO THE OTHER FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, EVEN IF SUCH PARTY SHALL HAVE BEEN ADVISED OF THE POSSIBILITY OF THE SAME. To seek remedy under this limited warranty, contact EarthWay Products, Inc. at support@earthway.com or write to EarthWay Products, Inc. 1009 Maple Street, Bristol, IN 46507 and describe the nature of the manufacturing defect. SPECIFIC LIMITATIONS: This limited warranty covers only the part(s) or product; any labor charges associated with repair or replacement of non-conformances are specifically excluded.

The above-listed warranty procedure is a condition precedent to bringing any legal action to enforce this limited warranty. Any action to enforce any portion of this limited warranty must be commenced within ninety days after the expiration of the limited warranty coverage period. Any performance of repairs will not suspend this limitation period from expiring, unless state law provides otherwise. Any performance of repairs after the limited warranty coverage period has expired, or performance of repairs regarding anything excluded from coverage under this limited warranty shall be considered "good will" repairs, and they will not change the express terms of this limited warranty or extend the limited warranty coverage period.

Exclusive jurisdiction for deciding legal disputes relating to alleged breach of warranty or representations of any nature relating to this limited warranty must be filed in the courts of Elkhart County within the State of Indiana. Any and all claims, controversies, and causes of action arising out of or relating to this limited warranty, whether sounding in contract, tort or statute, will be governed by the laws of the State of Indiana, without giving effect to any choice or conflict of law provision or rule.

NO OTHER WARRANTY, EXPRESS, IMPLIED OR STATUTORY, SHALL APPLY, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY, APPLICATION OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER WARRANTY OBLIGATION ON THE PART EARTHWAY, AND ALL SUCH WARRANTIES ARE EXPRESSLY DISCLAIMED. In the event that applicable law prevents the disclaimer of any implied warranties, then such implied warranty shall be limited to the fullest extent permitted by law. Without limiting the foregoing, if applicable prevents the disclaimer of any such implied warranties, this limited warranty limits the period of time in which a claim for breach of implied warranties, including but not limited to the implied warranty of merchantability or fitness for a particular purpose, may be filed. In such event, any claim for breach of implied warranty must be brought before the expiration of this express limited warranty's one year term.